


JINSHI FENCE

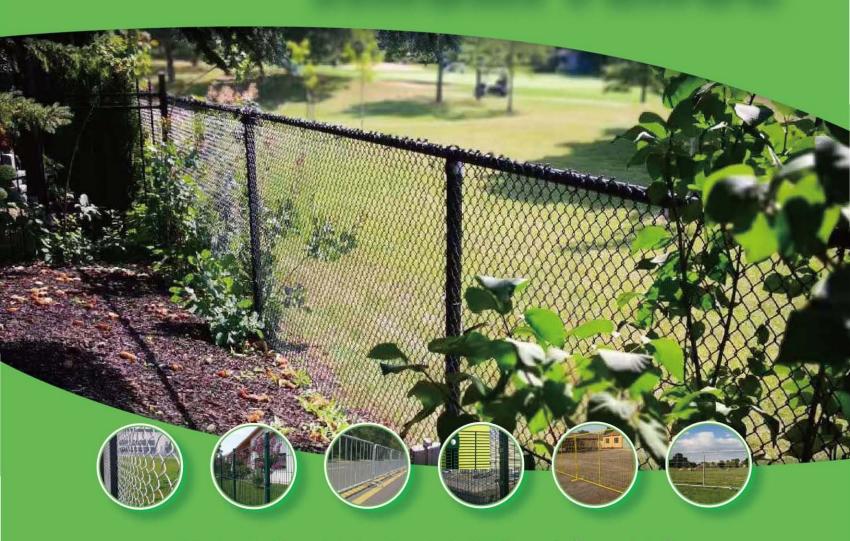

Hebei Jinshi Industrial Metal Co., Ltd.

Company Introduction

Hebei Jinshi Industrial Metal Co., Ltd is an energetic enterprise, founded by Tracy Guo in May 2008, since the company established, in the process of operation, we always obey integrity—based, quality—oriented and the principle of everything according to customers' need, than faith, than service, to provide you with the purchase of products do the selection, providing you with the most economical price and the perfect pre—market and after—sales service.

Now our company main products are: all kinds of fence, our products have exported to USA, Germany, Untied Kingdom, Norway, New Zealand, Australia, Canada, Russia, Japan, Korea and so on.

In the process of development, we have formed our own brand, HB JINSHI, making our products more competitive in the international market. Until now, we have attended Russian Building exhibition, Las vegas Hardware exhibition in USA, Australia building materials and design exhibition, SPOGA in cologne and canton fair in each period.

Hebei Jinshi industrial co., td adopts the advanced ERP Management System, which can be with effective cost control, risk control, optimizing and changing the traditional production processes, improve the operating efficiency, the full realization of "Collaboration," Quick Service" and Agile handling.

New century, new challenges and opportunities, we will continue to innovate and provide you with quality products and competitive price.

Welcome friends from all walks of life to come to visit, guidance and business negotiation.



I'M YOUNG
I WORK HARD
I'M HAPPY

Introduction

Temporary fence

(01)

Temp Chain Link Fencing

Crowd Control Barrier

Cattle Fence (09)

Stronger Warning Barrier 12

Farm Gate 13

Canada Temporary Fencing (15)

Wire Mesh Panel (19)

358 Fence (21)

Silt Fence (22)

Temporary fence ▼

Temporary fences, also known as mobile fences, temporary barriers, mobile security fences. The main part of the guard rail is mainly connected with the base or the guard column by means of a detachable member, and can be easily removed and moved for installation when necessary.



Australia Standard

Height	1m, 1.2m, 1.5m, 1.8m, 2m			
Width	2m, 2.2m, 2.4m,2.5m,2.9m			
Frame pipes	32 mmOD* 1.5mm 38mmOD*1.5mm			
Wire diameter	2.9mm, 3mm, 3.2mm			
Opening	60*150mm, 50*100mm, 50*150mm,100*200mm			
Surface treatment	Silver spray paint			
Feet	Orange plastic feet with cement			
Accessories	Clip & screw and nut			





Accessories





Temp Chain Link Fencing ▼

Temporary fencing with chain link mesh infill, which a major exporting portable fencing to Australia, America, England and Africa market. It is modular and plug-in installation for quick and efficient set up and take down when quickly established barriers are needed




Description


Temporary Fence with Stand

Actual Panel Size: 6'H x10'W, 6'H x12'W

- 1. Frame:16 gauge 1-3/8" OD tube
- 2. Bracing:16 guage 1" OD tube
- 3. Chainlink:11.5 gauge wire, Mesh: 2-1/4"x2-1/4"
- 4. Tie wire:12 gauge
- 5. Zinc Coat: 0.2 oz/sq.ft
- 6. Pipe End not flatten Stand:18"x24"









- Frame O.D.: 1.25", 1.5", 1.6" round optional.
- Brace: Cross, vertical, horizontal brace with 1" round or the same with frame O.D.
- Wire diameter: 9, 10.5, 11, 11.5, 12 gauge optional.
- Mesh opening: 2", 2.25", 2.4", 2.75" optional.
- Finish: Hot dipped galvanized & Pre-galvanized











JSF610

- 6' × 10' Temp Chain Link Fencing
- Dimensions (H × L): 6' × 10'.
- Frame O.D.: 1.25", 1.5", 1.6" round optional.
- Brace: Cross, vertical, horizontal brace with 1" round or the same with frame O.D.
- Wire diameter: 9, 10.5, 11, 11.5, 12 gauge optional.
- Mesh opening: 2", 2.25", 2.4", 2.75" optional.
- Finish: Hot dipped galvanized & Pre-galvanized

Accessories

- JSFAF feet Dimensions (H × W × TH):
- 23.6" × 4.3" × 0.3", 35.4" × 3.0" × 0.25"
- Hole size O.D.: 19 mm.
- Interior round steel rod/pipe: 30 mm O.D. × 150 mm H.
- Exterior square steel rod/pipe: 30 × 30 × 150 mm. Rod space: 30 mm.



- JSFAS feet Dimensions (H × W × TH):
- 36" × 13.75" × 20", 30" × 18" × 20"
- JSFAO feet Dimensions (H × W × TH):
- 36" × 13.75" × 20", 30" × 18" × 20"





- Clamp center distance: 80, 90, 100 mm Applied post O.D.: 25, 28, 32, 38, 40, 42 mm

 - Accessory List: 2 pieces clamps with 1 bolt and 1 nut.
 - Finish: Hot dipped galvanized & Pre-galvanized



Crowd Control Barrier

Crowd control barrier - effective & economical protection barriers for both pedestrians and vehicles from defined areas. It is constructed from steel pipe high strength material, anti-corrosive finish and flexible structures to make it ideal choice for temporary crowd control in various occasions.







Panel size	2.1*1.1m, 2.5*1.2m, 2.4*1.2m
Frame pipes	25X1.5mm, 38X1.5mm 1.2mm
Inner pipes	20X1.2mm, 16X1.2mm
Inner pipe space	100-200mm
Surface treatment	Sliver spray paint, powder paint





- Name: Pedestrian Barrier;
- Size: 2300x1100mm;
- With 2 flat base;
- Reflexes sheet: RA2 3M;
- Equipped with M10 plastic anti-loose nuts
- Other size as Drawing "Pedestrian Barrier 08, date 2019-09-13"
- Packing: by pallet,








Cattle Fence ▼

JSCYFC36

- Recommended Panel Type: AllRounder
- Recommended Crush PG450
- 2.2m Panel Qty 13
- Gate In Frame Qty 5
- Ramp Type 3.6m Ramp





JSCYFC130


- The C130 cattle is designed to handle a maximum of 130 head of cattle.
- Recommended Panel Type: Round or Oval
- Recommended Crush PG900
- 2.2m Panel Qty 31
- 1.8m Panel Qty 3
- Gate In Frame Qty 13
- Ramp Type 3.6m Ramp

JSCAF40S

- Height*Length :1.8*2.1m
- Frame pipes : 40*40mm*1.6mm/2mm 50*50mm*1.6mm/2mm
- Inner pipes: 40*40mm*1.6mm/2mm 50*50mm*1.6mm/2mm

JSCAFO3060

- Height*Length :1.8*2.1m
- Horizontal pipes: 30*60mm*1.6mm/2mm 40*80mm*1.6mm/2mm
- Vertical pipes: 40*40mm*1.6mm/2mm 50*50mm*1.6mm/2mm

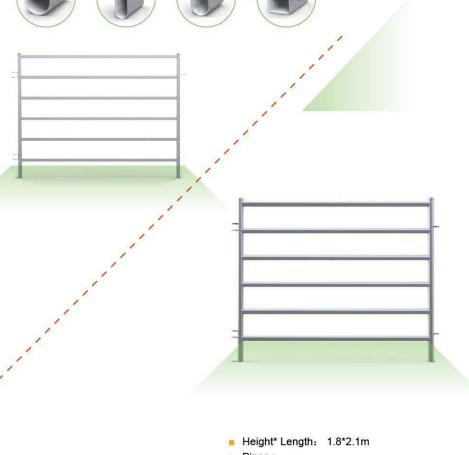


JSCAYF320D

Pipes :

32mmOD*1.6mm/2mm 42mmOD*1.6mm/32mm

MAIN GATES

- Horizontal pipe :40x40mm
- Vertical pipe :50x50mm
- Width :950mm/300mm
- Height :2200mm

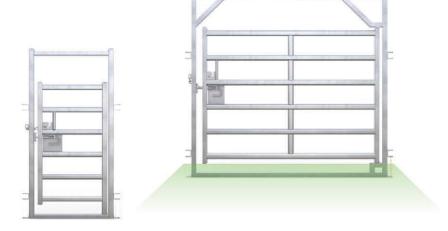






Stronger Warning Barrier ▼

With vertical direction stretched, the BR series safety fence canbe much lighter than the normal type but with higher strength. Besides, it is more rigid to stand which will help you to save some fence stakes. As a quick and easy way for temporary fence, it is widely used in construction site, bridge building, sewer holes. Also can be used as black off property line, garden fence, crowd control, boundary fence.







Material	High Density Polyethylene			
Color	Orange, blue, green or as required			
Mesh type	Rounded rectangle Openings			
Mesh size	Appr. 100x40mm			
Weight	60gsm-360gsm			
Width	1.0m/1.22m/1.5m/1.8m			
Length	Can be customized			
Package	Rolled and packed into a clear polybag with a Label inside, loaded loosely in the container or pallet with wrapping			


Farm Gate ▼

5mm Wire I Stay Farm Panel Gate in varying sizes and quality to suit your needs and budget. From the heavy duty "GI" Gate to a "N" stay gate to an economy "I" stay gate. We can have a gate customized and manufactured to your size and specification.









V Farm Gate

N Farm Gate

Farm Gate

- 5mm Wire I Stay Farm Panel Gate in varying sizes and quality to suit your needs and budget. From the heavy duty "GI" Gate to a "N" stay gate to an economy "I" stay gate. We can have a gate customized and manufactured to your size and specification.
- 8ft-16ft wide
- 1150mm-1170mm high
- Mesh size: 100*200mm,wire gauge of 5mm or I-Stay Farm Gates with "graduated" mesh
- "I" StayMade from high quality galvanized pipe
- Hot dip galvanized inside and outside(for zinc-coating 200g-300g)
- All pipe is a uniform 25NB(33.4mm), with a 2-2.2mm wall thickness
- Manufactured by trained technicians
- Zinc-based coating completely covers pipe, including welds
- Packing by steel pallet or steel frame pallet
- For zinc-coating of 200-300g farm fence gate, which are manufactured from high quality galvanized pipe. The pipe is galvanized on the inside as well as the outside to provide maximum protection and a long working life. The zinc based coating is applied to all sections and all welds are covered.
- We are professional fence products factory, with main products of horse panel, corral cattle panel, farm gate of 5 bars farm gate, I-stay farm gate and N-stay farm gate. All of our products will be done as clients need, quality is first for us.





Canada Temporary Fencing ▼

Strongest & Welded temporary fencing with platy fence feet and shaped top clips, which is major and welcomed portable fencing in Canada and North America. Modular fence panels with plug-in installation are designed for quick and efficient set up and take down





Dimensions (H × L): 6' × 8'.

Frame O.D.: 30 × 30, 40 × 40 mm optional.

Frame TH: 2.0-2.5 mm.

Middle horizontal pipe: 25 × 25 × 2 mm.

Wire diameter: 4.0,5.0,6.0 mm optional.


Mesh opening: 50×100, 50×150, 60x150,75×150 mm optional.

Finish: Electric galvanized before powder coated.
 Hot dipped galvanized after welding.




JSFCA610

JSFCA68



- Dimensions (H × L): 6' × 10'.
- Frame: 30*30mm 25*25mm,20*20mm.
- Frame Thickness: 1-2.5mm.
- Middle pipe: 20*20mm ,25*25mm.
- thickness: 1.2mm.
- Wire: 3mm 3.2mm.
- Mesh opening: 50 × 100, 50 × 150, 75 × 150 mm optional.
- Finish: Electric galvanized before powder coated.
 Hot dipped galvanized after welding.

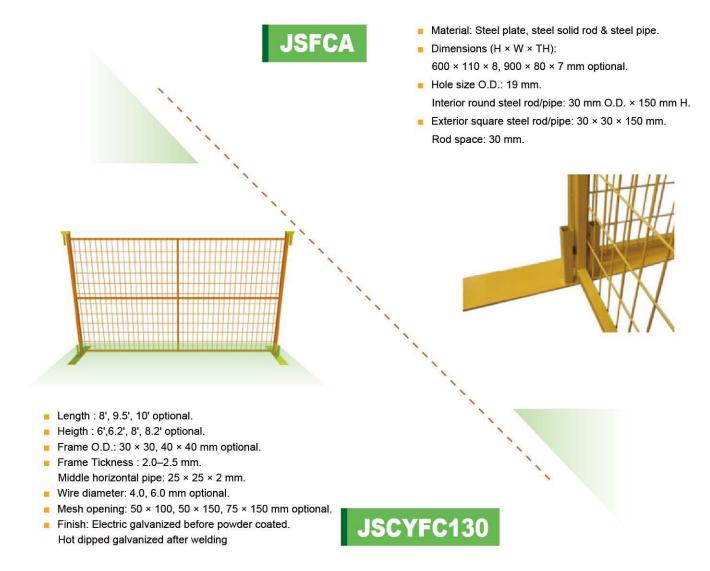

JSFCA68

- Top coupler plate/pipe: 110 × 40 × 8 mm.
- Left round steel rod/pipe: 30 mm O.D. × 150 mm H.
- Right square steel rod/pipe: 30 × 30 × 150 mm H.



Wire Mesh Panel ▼

Wire Mesh Panel			Post	Surface						
Wire Dia.	Mesh	/lesh Height	Majaht	Length	Folds	Anti-steal post 70x100mm	Treatment	Color	Packing	Remark
Wire Dia. Mesii Height	Lengui	or spuare pos	or spuare post 50x50mm/60x60mm							
		1.03m		2V	1.33m/pcs	Hot dipped galvanized or electro galvanized	Green, white,	Pallet	Custom sizes	
3.5mm,or		1.23m	2.0m	2V	1.53m/pcs					
4mm,or 50x200mm	1.53m	or	3V	1.83m/pcs	panels, plastic	black	T dilot	can be		
4.5mm		1.83m	2.5m	3V	2.13m/pcs	coated, PVC coated			acceptable	
		2.03m		4V	2.33m/pcs					





			3.8mm/4mm		
	Powder Painted	0.15-0.2mm	4.8mm/5mm		
Wire Diameter	PVC Coated		4mm/5mm		
	PVC Coated	0.8-1mm	3mm/4mm		
	Hot-dipped galvanized 0.15-0.2mm				
Panel Length	2.5m				
Panel height	1.2m,1.5m,1.8m,2m				
Mesh size	50*200mm,55*200mm,55*100mm,50*150mm				
	Galvanized then powder Painted				
Sureface	Galvanized then PVC Coated				
treatment	Hot-dipped galvanized then PVC Coated				
	Hot-dipped galvanized				

WIRE MESH PANEL





|--|

	Wire Diameter				Post of	
Panel (mm) Height*Width	Mesh Size mm.	Wire Dia mm	Wire Dia mm	Wire Dia mm	Height mm	
630x2500	50x200	8x2+6	6x2+5	6x2+4	1100	
830x2500	50x200	8x2+6	6x2+5	6x2+4	1300	
1030x2500	50x200	8x2+6	6x2+5	6x2+4	1500	
1230x2500	50x200	8x2+6	6x2+5	6x2+4	1700	
1430x2500	50x200	8x2+6	6x2+5	6x2+4	1900	
1630x2500	50×200	8x2+6	6x2+5	6x2+4	2100	
1830x2500	50×200	8x2+6	6x2+5	6x2+4	2400	
2030x2500	50x200	8x2+6	6x2+5	6x2+4	2600	
2230x2500	50×200	8x2+6	6x2+5	6x2+4	2800	
2430×2500	50×200	8x2+6	6x2+5	6x2+4	3000	

JSAC358

- Item: 358 high security fence.
- Wire gauge: 8.
- Wire diameter: 4 mm.
- Spacing cross wire: 0.5 in. (12.7 mm).
- Spacing vertical wire: 3 in. (76.2 mm).
- Panel width: 2400 mm.
- Panel height: 1800 to 3600 mm.
- Tensile strength: 500 550 MPa.
- Finish: hot-dip galvanized or powder-coated.
- Accessories: 40 × 6 mm flat bar clamp, galvanized M8 cup head bolts.
- Fencing top: barbed wire or razor wire.
- Post: RHS post or H post.
- Applications: prison security, airports, electric substations, railway stabling yards, etc.


SPIKE



Installation



Hexagon clips with screw and nut



Metal lath with screw and nut



SILT FENCE

Silt Fence is the ideal barrier for sediment control around construction sites or wherever there is bare or disturbed earth. The woven

geotextile used on wire backed silt fence is designed to filter out sediment from construction site run-off, yet allow clean water to pass through.

Silt fence is a temporary sediment barrier of entrenched permeable geotextile fabric designed to intercept and slow the flow of sediment-laden sheet flow runoff from small arras of disturbed soil. The purpose of this practice is to reduce slope length of the dis-turbed area and to intercept and red retain transported sediment form disturbed areas.



Product Applications Slit control at construction sites Required in some jurisdictions Mount on t-pst around perimeter Easily attached to existing site fences A more robust silt fence Can hold more slit before it needs to be cleaned Can double as a safety fence around a job site teel t-post are available

Welded wire mesh Type	Electro galv.(E.G)welded wire mesh and Hot dipped galv.welded wire mesh(H.D.G)			
Mesh Size	2"x4"or4"x4"or as required			
Wire Mesh Width	24",36",48",etc(2ft,3ft,4ft)			
Wire Mesh Length	100ft, 150ft or as required			
Fabric Material	100%PP material			
Fabric Weidht	70gsm,80gsm,90gsm,100gsm,etc.			
Fabric Width	36",48",60",etc(3ft,4ft,5ft)			
Fabric Length 100ft,150ft or as required				



JSTF6060

- Item: roll top fencing.
- Horizontal wire diameter: 5 mm, 6.3 mm
- Vertical wire diameter: 5 mm, 7.5 mm
- Horizontal wire spacing: 150 mm and 180 mm.
- Vertical wire spacing: 50 mm.
- Height: 900, 1200, 1500, 1800, 2100 mm.
- Length: 2400 mm.
- Square post: 50 × 50 mm and 65 × 65 mm.
- Finish: hot-dip galvanized or vinyl-coated.
- Color: silver, black, green or white.








JSCLF50

- Item: chain link fence.
- Wire gauge: 6, 9, 11 & 11-1/2.
- Mesh size: 2-1/8, 2, 1-3/4, 1-1/4, 1, 1/2, 5/8 & 3/8 inch.
- Height: 36, 42, 48, 60, 72, 84, 96, 120 and 144 inch.
- Finish: hot-dip galvanized or vinyl-coated.
- Color: silver, black, green or as required.







E-mail: Supplier@cnfence.com

Telephone:0086-311-87880855

Fax: 0086-311-87880711

Address: No. 29 Taihua Street, Shijiazhuang city, Hebei Province, China.



Hebei Jinshi Industrial Metal Co., Ltd.

Website: http://www.cnfence.com

